




DURAFLEX KA

Cover Profile For Expansion And Movement Joints Made Of Aluminium

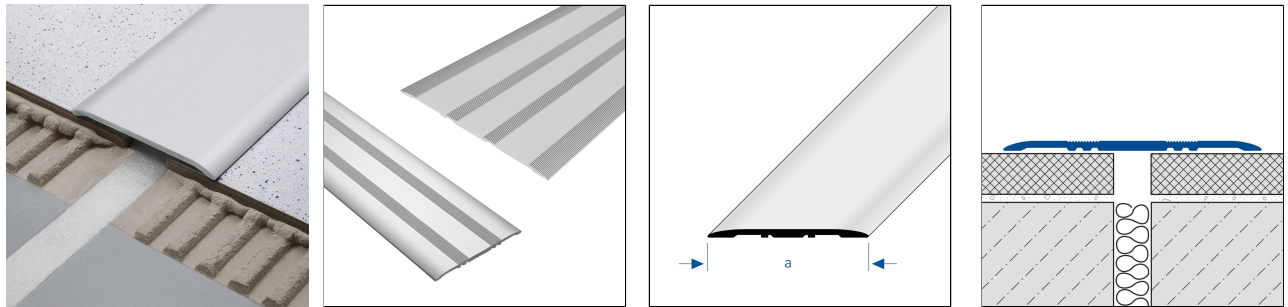

PROPERTIES

The 60 mm wide version has a smooth surface

All others have grooves

MATERIAL

Aluminium can be used wherever moderate mechanical stress is expected. Contact with alkaline materials (e.g. tile adhesive) can lead to discolouration that is difficult to remove afterwards. High humidity during the drying phase can intensify this process. Always wipe tile adhesive or grout off visible surfaces immediately with plenty of water, then wipe dry and ensure good room ventilation.

Suitability in terms of mechanical and chemical resistance must always be checked on a case-by-case basis.

CARE

Aluminium does not require any special care. If necessary, it can simply be cleaned with clear, clean water and a few drops of washing-up liquid. Then wipe dry.

Avoid using acidic or abrasive cleaning agents.

PROCESSING

1. The bonding surfaces must be cleaned and any contaminants, such as release agents, preservatives, grease, oil, dust, water, old adhesives/sealants and other substances that could impair adhesion, must be removed.
2. Select the profile according to the joint width.
 - Joint width up to 12 mm: 60 mm profile width
 - Joint width up to 20 mm: 80 mm profile width
 - Joint width up to 30 mm: 100 mm profile width
 - Joint width up to 50 mm: 120 mm profile width
3. Apply SPEED-FLEX adhesive sealant or a suitable alternative to the adhesive sides of the profile.
4. Press the profile firmly onto the prepared substrate.
5. Allow any adhesive sealant that may have escaped to dry, then carefully cut it off along the edge of the profile with a sharp knife

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.



without damaging the substrate, and then remove it.

The generally accepted rules of technology and tiling must be observed. Suitability for use with mechanical and chemical resistance must always be checked in each individual case.

TECHNICAL DIMENSIONS AND PRODUCT VARIANTS

| | |
|-------------|------------------------------|
| Material | [Aluminium] |
| Surface | [natural], [anodised] |
| Colour | natural, silver |
| Length | 250 cm |
| sight width | 60 mm, 80 mm, 100 mm, 120 mm |
| Height | 3.5 mm, 4 mm |

PRODUCT VARIANTS

| Ident | Height | Surface | Colour | Length |
|------------------|--------|----------|---------|--------|
| DFAE KA 600/250 | 3.5 mm | anodised | silver | 250 cm |
| DFAE KA 800/250 | 3.5 mm | anodised | silver | 250 cm |
| DFA KA 600/250 | 3.5 mm | natural | natural | 250 cm |
| DFA KA 800/250 | 3.5 mm | natural | natural | 250 cm |
| DFAE KA 1000/250 | 4 mm | anodised | silver | 250 cm |
| DFAE KA 1200/250 | 4 mm | anodised | silver | 250 cm |
| DFA KA 1000/250 | 4 mm | natural | natural | 250 cm |
| DFA KA 1200/250 | 4 mm | natural | natural | 250 cm |

Please note: For technical reasons, tolerances in color effects of the materials and print are possible. All information is based on the best of our knowledge and belief. No guarantee can be derived from this. We reserve the right to any technical changes if they are in the interest of progress or if they are production-related.